


False ceiling

BioEdilizia


CSF-01

Sound-absorbing and heat-insulating insulation with cork false ceiling preshaped and pre-finished Kontro

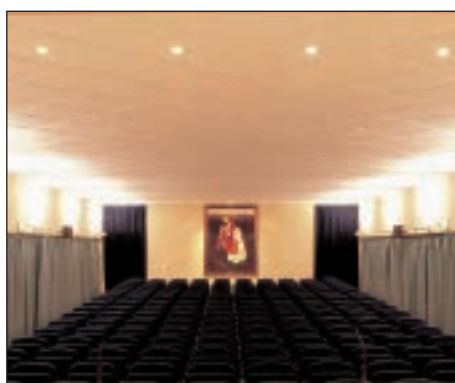

Sound-absorbing and heat-insulating insulation with cork false ceiling preshaped and pre-finished Kontro

CSF-01



Kontro



Alcover



COVERD
Applied technology
of natural cork
for acoustic and
bioclimatic insulation
Acoustics division
Energy division

Coverd
Via Sernovella 1
23879 Verderio (LC) IT
Phone +39 039 512487
Fax +39 039 513632
info@coverd.it
www.coverd.it



Specifications

Suspended ceiling in lowering with metal support structure Alcover base 35mm height 38mm with insertion of sound-absorbing and heat-insulating panels in natural blonde cork preshaped supercompressed and pre-finished Kontro. Kontro panels have a thickness of 3cm, size 60x60cm, density 200 / 220kg / mc with CE conformity certification according to EN standards 13964: 2004 with fire reaction (euro class) B s1 d0, durability class C. Colors and designs of your choice.

SokoVerd®
Membrane for suspended ceilings



Reaction to fire (Euroclass)	Class B s1 d0
Release of dangerous substances	Complies
Flexural strength (span 60x60 cm):	Class 1
Self-supporting capacity:	Complies
Durability:	Class C
Sound absorption:	$\alpha_W = 0,45$
Thermal conductivity:	$\lambda = 0,044 \text{ W/m}^2\text{K}$

COVERD
Applied technology of natural cork for acoustic and bioclimatic insulation
Acoustics division - Energy division
Via Sernovella 1 - 23879 Verderio (LC) IT Phone +39 039 512487 Fax +39 039 513632
e-mail info@coverd.it - www.coverd.it

PRODOTTO ITALIANO
MADE IN ITALY

This technical data sheet replaces and cancels previous versions (in case of doubt, check the code of the printed printout the date of the review and possibly visit our Internet site www.coverd.it in the dedicated section). The indications and the above provisions, are based on our current technical-scientific knowledge, which in any case are to be considered purely indicative, as the conditions of use are not controllable by us. Therefore, the buyer must still check the suitability of the product to the specific case, assuming all responsibility arising from use, holding and holding unscathed the Coverd from any consequent claim for damages. For any information contact our technical office.